

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- BLURRY OR ILLEGIBLE TEXT
- SKEWED/SLATED IMAGES
- COLORED PHOTOS
- BLACK OR VERY DARK BLACK AND WHITE PHOTOS
- UNDECIPHERABLE GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>5</sup> : H04B 7/26, H04M 1/72, 11/06		A1	(11) International Publication Number: WO 94/21058
			(43) International Publication Date: 15 September 1994 (15.09.94)
(21) International Application Number: PCT/SE94/00168		(81) Designated States: AU, CA, CN, KR, NO, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 1 March 1994 (01.03.94)			
(30) Priority Data: 026,478 4 March 1993 (04.03.93) US		Published With international search report.	
(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON [SE/SE]; S-126 25 Stockholm (SE).			
(72) Inventor: STEIN, Per, Anders, Lennart; Döbelnsgatan 25, S-113 58 Stockholm (SE).			
(74) Agents: LÖVGREN, Tage et al.; Telefonaktiebolaget LM Ericsson, S-126 25 Stockholm (SE).			

(54) Title: MODULAR RADIO COMMUNICATIONS SYSTEM

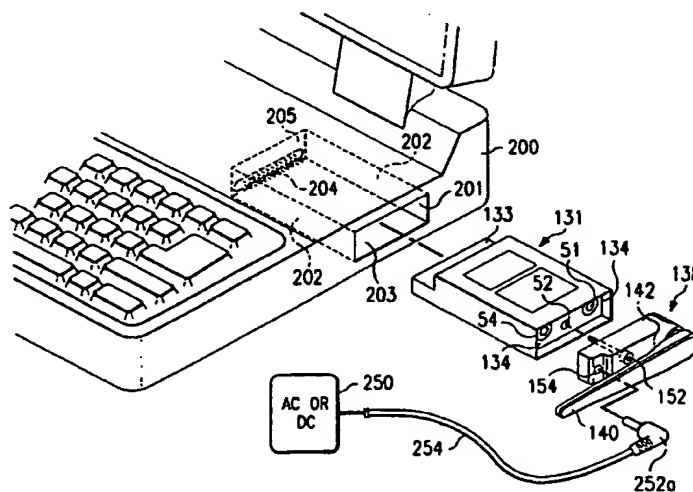

(57) Abstract

A modular telecommunications system configured for wireless telecommunication in accordance with a pre-selected standard. Modular units (131) are adapted to be secured within other items of electronic equipment (200) for establishing a telecommunications link with a wireless network. The modular telecommunications unit (131) comprises a housing for mounting a radio transceiver (36) therein. The housing includes a plurality of contacts (41A and 41B) arranged along a first end (133), the contacts (41A and 41B) being adapted for engagement with contacts (204) in the electronic equipment (200) and at least one radio connector (51) disposed along the second, opposite end of the housing and connected to the radio transceiver (36) within the housing whereby the radio transceiver (36) can be coupled to an antenna (140) to enable communication therefrom.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## MODULAR RADIO COMMUNICATIONS SYSTEM

## BACKGROUND OF THE INVENTION

Field of the Invention

5       The present invention relates to modular telecommunication equipment and, more particularly, to a card mounted radio transceiver and/or modem for use in establishing a link to a wireless network for electronic equipment such as personal computers.

10       History of the Prior Art

      The fields of both data processing and telecommunications have experienced marked advances in recent years. Personal computers have become smaller and more efficient in their progression through  
15       desktop, laptop, notebook, and palmtop versions. The great advances in microprocessors, memory chips and miniaturization techniques have also enabled more and more computing power to be packaged in smaller and smaller spaces.

20       Personal computers are manufactured by many different suppliers around the world. An entire industry has subsequently developed in supplying memory cards for enhancing the capacity of this wide variety of personal computers. Recently, there has been a  
25       movement toward standardizing the interconnection formats for use in circuit cards for personal computers. In particular, the PC and Memory Card International Association (PCMCIA) was formed with the goal of promoting the interchangeability of integrated  
30       circuit and memory cards among computer and other types of electronic products. Toward this end, the PCMCIA has promulgated certain physical and electrical standards to ensure that cards will be able to be used in different pieces of equipment. Both data storage,  
35       i.e. memory, and peripheral expansion, i.e. I/O, card types constructed in accordance with standards should be able to be used in any connectors also constructed

-2-

in accordance with the standards. Such a standard is set forth in a variety of documents including the PCMCIA PC Card Standard, Release 2.0, incorporated by reference herein. The standard sets forth a 68 pin interchange for I/O type circuit cards for use in PC's.

Advances in wireless telecommunications have also moved rapidly in recent years. Various communication standards have been promulgated around the world defining specific frequencies, data rates, data formats, and the like for both voice and data communications by radio links between base stations and mobile units. For example, specialized packet switching systems for mobile data communications have enabled portable computers to directly uplink data access into the landline data communication network. Similarly, conventional voice based cellular radio systems, both analog and digital versions, can receive data from portable computers and transmit that data through the conventional telephone network to a remotely located data terminal. In addition, other systems such as paging (both local and global), DECT (Digital European Cordless Telecommunications), Mobitex, CDPD (Cellular Digital Packet Data), PCS (Personal Communications System) and the like have come into recent use. Each of these wireless telecommunications formats and standards generally requires separate software to provide a gateway for data into the wireless network as well as separate transmission/reception formats. This allows communication with radio base stations operating in different geographic areas as well as parts of different networks. It would be desirable, however, to package radio transceivers and/or modems in a modular manner so that a telecommunications terminal, such as a portable telephone or a portable personal computer,

-3-

could be adapted for communication with different systems by simply replacing the modular unit with one which was especially configured for the telecommunications network with which communication was desired.

The use of card mounted telecommunications interface equipment in a PC has existed for some time. In particular, modems are frequently mounted on an I/O card and plugged into receiving receptacles within the PC. The modem then enables the interface of a PC with standard telecommunication network lines and the transmission/reception of data for those lines. This is an extremely useful tool and maximizes the usefulness of the PC.

More recently, the company GEC PLESSEY developed a radio transmitter for a wireless local area network (WLAN) for a standard card engagement with a PC so that data can be transmitted within approximately a hundred meters with a frequency band reserved for such activity. However, this radio transmitter for a wireless LAN does not incorporate the requisite flexibility and communications alternatives inherent in Applicant's present system which overcomes many of the disadvantages of the prior art.

It would be an advantage therefor to provide a standard PCMCIA card mounted radio transceiver which is readily replaceable in order to enable electronic equipment to communicate with various networks and in accordance with various radio standards merely by interchanging such a card. The system of the present invention and various components thereof provide such advantages.

SUMMARY OF THE INVENTION

-4-

The present invention relates to modular radio communications equipment. More particularly, one aspect of the present invention includes providing card mounted radio telephone and/or modem equipment configured for wireless telecommunication (which includes voice and/or data) in accordance with a preselected standard and/or format. Such modular units may be replaceably secured within other items of electronic equipment for establishing therefrom a telecommunications link with a wireless network. In one embodiment, such equipment includes portable cellular radio subscriber terminals.

In another aspect, the invention includes a modular housing for mounting a radio transceiver adapted for telecommunications in accordance with a preselected standard. An array of contacts are arranged along a first end of the housing and adapted for engagement with a mating array of contacts in an item of electronic equipment, such as a computer or portable communications device. A separate antenna connector is disposed along either the first or second end of the housing. The connector is coupled to the radio transceiver within the housing, and adapted for being coupled to a separate antenna structure to enable communication from the radio transceiver. As used herein, the term radio transceiver may also include a modem whereby both voice and data may be transmitted and received by the antenna. The antenna may be contained within the item of electronic equipment, such as in the computer chassis, or it may be provided as an external attachment to the housing.

In yet another aspect, the above described invention includes a connector for coupling the radio transceiver (which may include a modem) contained within the housing to a power source for the supply of

-5-

current thereto. The power connector may include enlarged ones of the contacts of the contact array disposed on the first end of the housing adapted for plugging into a power source provided within the electronic equipment. In an alternative embodiment, the power connector may be disposed along the second opposite end of the housing for connection to a power source external of the item of electronic equipment. As herein described, the item of electronic equipment for the modular telecommunications unit may comprise a personal computer, a cellular telephone, a digital notebook and the like.

In a further aspect, the present invention includes a method of providing modular telecommunications for an item of electronic equipment, comprising the steps of providing a modular housing and mounting a radio transceiver adapted for telecommunications in accordance with a pre-selected standard in the housing. An array of contacts is disposed along a first end of the housing. The contact array is adapted for mating engagement with a contact array located in the electronic equipment. One or more connectors may then be disposed along either the first or a second end of the housing for select interconnect functions. In one embodiment a connector may couple the radio transceiver within the housing to an antenna located in the electronic equipment or mounted externally thereof. In another embodiment, a connector may couple a power source located in the electronic equipment or external thereof. The housing is then inserted into the electronic equipment and the contact array of the housing is plugged into the mating contact array of the electronic equipment to establish electrical communications therebetween. In this manner, a method of modular telecommunications for the particular



-6-

electronic equipment is provided in a configuration greatly facilitating the use and efficiency thereof.

#### BRIEF DESCRIPTION OF THE DRAWINGS

5 For a more complete understanding of the present invention and for further objects and advantages thereof, reference may now be had to the following description taken in conjunction with accompanying drawings, in which:

10 FIG. 1 is a block diagram illustrating an overall concept employed in one aspect of the present invention;

FIG. 2 is a block diagram illustrating the use of modular radio equipment within a PC;

15 FIG. 3 is a top plan view of one embodiment of a modular telecommunications unit constructed in accordance with the principles of the present invention;

20 FIG. 4 is a front elevational view of the modular unit shown in FIG. 3 illustrating the pin connections thereto;

FIG. 5 is a rear elevational view of the modular unit of FIG. 3 illustrating one embodiment thereof with no antenna or power connector thereon;

25 FIG. 6 is a side elevational, cross-sectional view of the modular unit of FIG. 3 taken along the lines 6-6 thereof.

30 FIG. 7 is a rear elevational view of another embodiment of a modular telecommunications unit constructed in accordance with the principles of the present invention and having a standard PCMCIA card interconnectivity format;

35 FIG. 8 is a top plan view of the modular unit of FIG. 7 illustrating an external antenna mounted thereon;

-7-

FIG. 9 is a side elevational, cross-sectional view of the modular unit of FIG. 8 illustrating the attachment of the antenna thereto;

5 FIG. 9A is a front elevational view of the modular unit of FIG. 7 illustrating a standard PCMCIA card interconnectivity format;

FIG. 10 is an exploded, perspective view of a modular unit of the type shown in FIG. 8 in association with a module receiving slot in a PC;

10 FIG. 11 is an exploded, perspective view of an alternative embodiment of the modular unit of FIG. 10 and its mounting in a PC;

FIG. 12 is an exploded, perspective view of the modular unit of FIG. 3 being inserted in a PC having a built-in antenna and power supply therefor;

15 FIG. 13 is an exploded, perspective view of a modular unit constructed in accordance with the principles of the present invention and illustrating its adaptability for use in a combination of electronic equipment; and

20 FIG. 14 is an exploded perspective view of a modular unit constructed in accordance with the principles of the present invention and illustrating multiple applications thereof.

25

#### DETAILED DESCRIPTION

Referring first to FIG. 1, there is shown portable communications devices in the form of a data processing unit, such as a laptop or notebook computer 11 and a portable telephone instrument 12. It is well established to allow the PC 11 and telephone 12 to communicate with various wireless telecommunication networks. Each of the telecommunication networks may, however, include different telecommunication standards and/or require modems of different types as represented

30

35

-8-

diagrammatically in blocks 13-16. The various telecommunication standards may include, for example, AMPS, D-AMPS, JDC, TACS, GSM, NMT-450, NMT-900, DECT, Mobitex and future Spread Spectrum standards, as well as many more.

Still referring to FIG. 1, the portable telephone subscriber instrument 12 may include basic components for telecommunications with various wireless networks operating in accordance with numerous telecommunications standards. For example, should the telephone instrument 12 be needed for use in the United States, it must be capable of transmitting/receiving on a defined frequency band and in accordance with either the analog or digital modulation techniques in use in the United States. However, should the telephone instrument 12 be needed for communication with the wireless system which exists in the U. K. or Continental Europe, it would have to be capable of communicating on different frequencies and in accordance with somewhat different modulation techniques in order to be useful.

Referring still to FIG. 1, the laptop computer 11 may be needed for data communication with a number of different data networks which exist in a number of parts of the world. For example, a package switched data network exists in the Scandinavian and several European countries and in the United States and Canada which functions utilizing data packets of a prescribed size. The package switched data network is constructed in accordance with a prescribed protocol and provided as part of a service referred to by the trademark "MOBITEX" with which the assignee of the present invention is associated. Similarly, the laptop computer 11 may also be needed for communication with the United States cellular radio network (either in analog or digital format), with the European GSM

-9-

digital cellular radio network, or the CDPD (Cellular Digital Package Data) network from time to time. Thus, the broad concept of the system of the present invention includes providing radio transceivers and/or modems 13-16 which are adapted for use in communication with the various networks in accordance with various standards used therein. Additionally, the term "transceiver" as used herein comprises appropriate radio control logic of the type necessary to make up a radio device that is capable of communicating with a wireless communication standard such as D-amps, GSM, etc. For example, the transceiver may include a transmitter, receiver, and when the communications device is used for data transmission, the transceiver may also incorporate data modem circuitry.

Still referring to FIG. 1, the modem 13 provides for radio communication with the MOBITEK packet data switched network, while modem 14 represents a modular unit which could be constructed to communicate with the conventional cellular radio network in the United States, either in analog or digital format. Similarly, the modem 15 might be adapted for radio communication with the European digital cellular radio network in accordance with the GSM standards adopted by the European Telecommunications Standards Institute (ETSI). Modem 16 could, likewise, permit telecommunications in accordance with the Digital European Cordless Telecommunications (DECT) standard. Any of modems 14-16 might be useful within either the laptop computer 11 or the telephone subscriber instrument 12 while those units, as well as the MOBITEK data packet modem 13, could be used within the laptop computer 11. Moreover, the use of standard modems packaged in a modular form in standard sizes, would have great advantages in the future in providing flexibility within both voice and

-10-

data telecommunication systems used throughout the world.

Referring next to FIG. 2, there is shown a computer 21 which may comprise either a laptop, notebook, pen based, or conventional desktop PC. Also represented are several standard modems 22-26. The modems 22-26 are adapted for enabling the PC 21 to communicate on any one of a plurality of different telecommunications networks, each operating in accordance with different standards and protocols. Modem 22 thus allows communication of the PC 21 on the MOBITEK package switched data network. Modem 23 allows communication on the GSM European digital cellular radio network, while modem 24 allows communication on the DECT network. Modem 25 permits communication on a paging network such as a local or a global paging system, while modem 26 enables communication on a PCS (Personal Communication System). The PCS may become the next generation of cellular systems combining wide area networks and on-site networks for both data and voice communication. The system of the present invention thus allows such modems 22-26 to be constructed in accordance with a standard modular format that contains consistent and fixed form factors having standard electrical pinouts and common interfaces to the PC 21, or the like, enabling a simple plug interconnection therewith. This is a marked advance over the prior art.

Referring now to the grouping of FIG.s 3-6 and 7-9A, there is shown two versions of a telecommunications unit constructed in accordance with the principles of the present invention. FIG.s 7-9A (group one) illustrate a telecommunications unit 31 which is constructed to conform with a standard PCMCIA card interconnectivity format embodied in connector 133.

-11-

FIG.s 3-6 (group two) illustrate a unit 131 which is constructed with a modified connector 33 which does not comply with existing PCMCIA standards due to modifications in antenna and power connections discussed below. Each version of the above-referenced telecommunications unit will now be discussed. Referring first to the group two version of the telecommunication unit outlined above, there is shown in FIG. 3 a top plan view of a modular telecommunications unit 31 constructed to conform with a modified PCMCIA card interconnectivity format. In particular, the modular unit 31 includes an outer shell 32 which is generally flat and has located at a first end 33A a multipin connector 33 (seen most clearly in FIG. 4) having a plurality of individual contacts for engagement with a mating connector located within an item of an electronic equipment, such as a PC. It should be noted that although a PC is referred to, a variety of electronic equipment could be addressed and modified in accordance with the principles of the present invention to provide modular telecommunications therefrom. In that regard, the opposite end 34A of the modular unit 31 includes a recessed region 34 where external power and antenna connectors may be mounted, as described below with regard to FIG. 7.

Still referring to FIG. 3 and as shown by dotted lines extending thereacross, the module 31 houses a telecommunications card 29 including a radio transceiver 36, which may include a modem section 37. The card 29 is shown by dotted lines as are transceiver and modem sections 36 and 37. Data from electronic equipment, such as a PC, is coupled into the card 29 through selected contacts from the multipin connector 33, describe in more detail below.

-12-

Referring now to FIG. 4, there is shown a front elevational view of the modular unit 31 of FIG. 3, illustrating more clearly the multipin connector 33. The contacts of multipin connector 33 are connected to circuitry within the telecommunications card 29. The connector 33 comprises a pair of rows of contacts 41A and 41B constructed in accordance with a modification to the standard PCMCIA format. In the system of the present invention, certain areas of the contact array have been modified and the contacts provided in a different configuration and/or format to allow connection to an antenna and/or power source for transmission of increased amounts of power into the circuitry of the card 29. Such connection may be necessary when the power requirements of the transceiver 36 (and/or modem 37) cannot be adequately handled by the normal signal carrying contacts 41A-41B. Contacts 49A and 49B are thus shown to illustrate such a modified power pin configuration. Connector 49C illustrates an antenna coupling. It should be noted that other antenna and power connections may be provided in accordance with the principles of the present invention and another specific embodiment is described below.

Referring now to FIG. 5, the end 34A is formed with a recess 34 wherein other connectors may be mounted for use in coupling the radio transceiver 36 and modem 37 within the module 31 to an external antenna. However, with the antenna connector 49C and power connectors 49A and 49B provided along connector 33, such external connectors are not necessary along the opposite end in recess 34. For this reason, no connectors are shown in this particular embodiment.

Referring now to FIG. 6, there is shown a side elevational, cross sectional view of the module 31. As

-13-

most clearly shown in this view, the telecommunications card 29 of module 31 includes a printed circuit board 61 onto the surface of which various printed circuit card traces may be formed and various components for example, ASICs (Application Specific Integrated Circuits) may be mounted to comprise the radio transceiver and modem secured within the module 31. The circuitry on the board 61 is selectively connected to the terminals 41A-41B on the connector 33 to couple signals into and out of the circuitry within said module. An upper shell 62 covers the upper portion of the components mounted on the board 61 while a lower shell 63 covers the lower surface of the board and mates with the upper shell 62 to form an enclosed modular unit.

Referring now to the group one version of the telecommunications unit outlined above, there is shown in FIG. 7 a rear elevational view of another embodiment of a modular telecommunications unit constructed in accordance with the principles of the present invention. In this embodiment, the standard PCMCIA card interconnectivity format is utilized. Modular unit 131 of FIG. 7 includes a recessed rear portion 134A having a recess 134 wherein coaxial connector 51 is secured adjacent a mounting member 52 such as a threaded coupling. The coaxial connector 51 is mounted for use in coupling the radio transceiver 36 within the module 131 to an antenna disposed either internally or externally of the particular electronic equipment in which the unit 131 is connected. For example, an external antenna is shown in FIG. 10, while an internally mounted antenna is shown in FIG. 11. The internal antenna shown in FIG. 11 is but one example of an antenna which may, for example, be mounted inside a laptop computer that has been specifically modified for



-14-

use with the telecommunications system of the present invention. When an antenna is mounted directly to the module 131, mounting member 52 provides a means for securement of the antenna structure to module 131, as  
5 will be described in more detail below. A connector 54 is also shown. Connector 54 enables coupling of external power to the telecommunications card 29 within the module 131.

Referring now to FIG. 8 there is shown a top plan  
10 view of the modular unit 131 of FIG. 7 illustrating in more detail the external antenna mounting structure 138 which may be attached to end 134A thereof. As described above, radio transceiver 36 and modem 37 are shown by dotted lines which also define the  
15 telecommunications card 29. The mounting member 52 and connectors 51 and 54 of FIG. 7 are also represented in FIG. 8 by dotted lines. Connector 51 comprises a coaxial antenna coupling which is plugged into the antenna 138 of FIG. 8. The particular modular antenna  
20 structure of FIG. 8 includes an antenna bar 140, which is pivotally mounted through pivot antenna mount 141 to rotate about a base structure 142. Base 142 is coupled to the module 131 with a conventional fastener, such as a threaded member 152 shown in dotted lines engaging  
25 mounting member 52. Antenna connector 51 is also shown by dotted lines to illustrate a conventional coaxial connection thereto from antenna 140. The antenna 140 may then be rotated into the most appropriate position for maximizing effectiveness of use. Rotatable  
30 antennas are, of course, conventional in this technological area. The use, however, of such a modular antenna on a modular housing 131, adapted for the applications described herein, is a marked advance over the prior art. Power connector 54 is also shown

-15-

by dotted lines in registry with access aperture 154, which will be discussed below.

Referring now to FIG. 9 there is shown a side elevational, cross-sectional view of the modular unit 131 of FIG. 8 taken along lines 9-9 thereof. As shown in FIG. 9, the module 131 includes a telecommunications card 29 comprising a printed circuit board 161 onto the surface of which various printed circuit card traces may be formed and various components may be mounted to comprise a radio transceiver and modem secured within the module 131. The circuitry on board 161 is selectively connected to the terminals of connector 133 to couple signals into and out of the circuitry within the module. An upper shell 162 covers the upper portion of the components mounted on the printed circuit board 161 while a lower shell 163 covers the lower surface of the board and mates with upper shell 162 to form an enclosed unit similar to that shown in FIG. 6 for modular unit 31. In this particular view an internal portion of coaxial connector 51 is shown mounted to board 161 and projecting through rear portion 134A to connect with modular antenna 138. The construction of modular antenna 138 is as described above in connection with FIG. 8.

Referring now to FIG. 9A there is shown a front elevational view of the modular unit 131 of FIG. 7, illustrating more clearly the multipin connector 133. The multipin connector 133 is constructed in accordance with the current standard PCMCIA card interconnectivity format. The contacts of multipin connector 133 are connected to the circuitry within the telecommunications card 29. The connector 133 comprises a pair of rows of contacts 41A and 41B. No separate power or antenna connectors are shown herein due to the fact that this particular contact

-16-

configuration conforms with the existing PCMCIA standard and the antenna and power connectors are presented in the rear portion 134A of module 131 as described above.

5           Referring now to FIG. 10 there is shown an installation of the modular unit 131 into a PC 200 which has been modified in design to include a mounting slot 201. The mounting slot 201 is particularly adapted for receipt of and connection to module 131.  
10   The slot 201 is constructed with side walls 202 and a frontal opening 203. A mating connector 204 is disposed along end 205 for mating connection with connector 133. The modular antenna structure 138 (described above) is also shown in position for  
15   mounting to the end 134A of unit 131. Connecting end 134A thus includes recess 134 which houses connectors 51 and 54. Connector 51 is preferably a coaxial connector adapted for coupling to antenna 38, while  
20   connector 54 is constructed for connecting external power to the modular unit 131 through aperture 154 found in antenna base structure 142. In that regard, an AC/DC power supply 250 is shown in position for connection to connector 54 by a connecting plug 252A which is connected to the power supply 250 by a cable  
25   254. In this manner, external power may be provided to the module 131 from an external source.

          Referring now to FIG. 11 there is shown an alternative mounting of the modular unit 131 of FIG. 10 and an alternative modification to the PC 200. In this  
30   particular view, the modular unit 131 is being installed in PC 200 constructed with a flap 280. The flap 280 is provided in a configuration for closure over the unit 131 and direct coupling with coaxial connector 51, while continuing to expose external power  
35   connector 54. In this embodiment, an internal antenna

-17-

270 is installed within the PC 200 and connected by a wire 271 (shown in phantom) to flap connector pin 272 of flap 280. Aperture 273 is positioned in flap 280 for alignment with power connector 54 of module 131 and sized to facilitate receipt of, and connection from, plug 252A into connector 54. As described above, connector 133 of module 131 is shown to matingly connect with slot connector 204 disposed on end 205 of slot 201. In an alternative embodiment, not specifically shown, an internal power supply from the PC 200 may be connected to the connector 54 of module 131 by coupling to a power connection pin disposed on the flap 280 in place of the aperture 273. The illustration thereof, if shown, would be similar to the illustration of the power supply 290 of FIG. 12 (discussed below) but with a line 291 extending to the flap 280.

Referring now to FIG. 12 there is shown the installation of the modular unit 31 of FIG. 3 into an item of electronic equipment. In this embodiment, the external connectors 51 and 54 described above are not utilized and are thus not present on end 34A. The absence of the external connectors is due to the connection through connector 33 of antenna 270 and separate power supply 290 from within the PC 200. As stated above, this is a modification to the standard PCMCIA and interconnectivity format. The PC 200 has thus been modified in design to specifically accommodate the unit 33 and the advantages thereof. Power supply line 291 is thus shown by a dotted line to connect pin 292 of specially adapted connector 204A positioned in registry with, and mating engagement of, the appropriate power connecting contacts 49A or 49B (shown in FIG. 4). Connector 204A is a modified form of the connector 204 of FIG. 10 due to the fact that it

-18-

must provide connection to the antenna and power contacts herein referenced. Likewise antenna cable 270A is shown by a dotted line to connect pin 293 of connector 204 positioned in registry with, and mating engagement of, antenna connector 49C (shown in FIG. 4). It may be seen in this particular embodiment that the advantages of both the communications antenna and the additional power supply are provided without the need for external connections from end 34A. The module 31 can simply be plugged into slot opening 203, whereby connector 33 mates with connector 204, and the telecommunication system becomes operational.

Referring now to FIG. 13 there is shown a diagrammatical illustration of yet another aspect of the present invention. The combination of use of the modular unit 31 of FIG. 12 is illustrated wherein its placement within a PC 200 is only one of at least two possible functions. It should be noted that either module 31 or 131 could be used in such a combination. Reference to module 31 is for purposes of illustration. The modular units 31 and 131 may likewise be placed within a cellular unit 295 as represented by line 296 extending there between. The modular units 31 and 131 are thus capable of multiple use with multiple items of electronic equipment. It should be noted that the absence of connectors on end 34A of the modular unit illustrated indicates that antenna and power connections are made through connector 33 and that the particular electronic equipment that is adapted for use therewith provides such an antenna and power supply. However, as stated above, module 131 could also be used in such applications.

Referring now to FIG. 14 there is shown a diagrammatical illustration of the versatility and multiple uses possible with the modular units 31 and

-19-

131 of the present invention. As stated above, either module 31 or 131 may be used in such applications, although only module 31 is represented in this particular drawing. As represented herein, there are at least two wireless functions provided by the modular units 31 and 131. Several technologies may, in fact, reside on a single card within the modular units 31 and 131. For example, a Mobitex and AMPS communication formats may be utilized. With the unit 31 herein shown plugged into a notebook 300, data communication over Mobitex may be therein provided. Telephone calls may likewise be completed through the AMPS system or other format, wherein a head set 302 is shown linked to the notebook 300. An infrared link 304 is illustrated, although other connections would be possible. Likewise, module mounting slot 306 is shown within housing 308 of notebook 300. A communication antenna 310 is shown on the top 312 of the notebook 300. The notebook 300 may be of a conventional design which has been modified for the slot 306 and the other connection and system aspects described above. More specifically, the slot 306 is constructed for the receipt of, and mating engagement with, connector 33 of the module 31. It may be seen that the module 31 in this particular embodiment is constructed for both power and antenna couplings from the area around connector 33, as described in FIG. 4 above. For this reason, no external connectors are shown on end 34a. For purposes of simplicity, the appropriate connectors inside the notebook and other electronic equipment shown in this particular illustration are not illustrated.

Still referring to FIG. 14, a second utilization of the module 31 may be within a cellular telephone 309. The phone 309 incorporates a chassis 309A of conventional design, or which incorporates a special

-20-

display (not shown). The module 31 is inserted into slot 311 and connected with a software generated display that corresponds to technology and the standards that are activated. In that regard a touch screen may then display the available phone features that can then be dialed. Antenna 312 is shown to upstand from chassis 310 in accordance with the aspects of the invention discussed above.

Still referring to FIG. 14 there is shown a pen based computer 313 or similar structure which serves to provide pen input while generating a display similar to a cellular phone when activated. Due to the fact that the system for a cellular phone is already in the computer by virtue of the module 31 secured within slot 314, the user can use the option of telephonic communication by simply connecting a headset 316 through an infra red connection 318 or a headset 320 connected by a conventional cable 322. The computer can then be simultaneously used for data communication, faxes, and other forms of informational exchanges which are deemed necessary.

As described above it may be seen that the modular units 31 and 131 have multiple uses. From a design perspective, they may be relatively thick, on the order of 10.5mm and the particular electronic equipment will have to be appropriately modified in design for receipt thereof. The edge 33 of the modular unit 31 may include a standard PCMCIA 3.0mm card interconnection. Moreover, as described above the card edge connector 33 may include special pin outs 49A and 49B for higher power connection and consumption in certain situations.

It may further be seen from the figures above that antenna connections, as well as special power connections, enable the implementation of a modular unit with a minimum of special adaptations required for

-21-

individual installations. (See particularly FIG. 14.)  
In this way, the system of the present invention  
enables the construction of modular radio  
communications units for flexible adaptation to  
5 different standards and different circumstances but  
which can be incorporated into a standard card slots in  
a variety of electronic equipment.

While it is believed that the operation and  
construction of the system of the present invention  
10 will be apparent from the foregoing description, the  
method of operation and structure of the system shown  
and described has been characterized as being preferred  
and obvious changes and modifications may be made  
therein without departing from the spirit and scope of  
15 the invention as defined in the following claims.



-22-

## WHAT IS CLAIMED IS:

1. A modular telecommunication unit for an item of electronic equipment for establishing therewith a telecommunications link to a wireless network, said unit comprising:

a housing including a system connector disposed along a first end thereof for electrical interconnection with said equipment and the receipt of signals therefrom;

a radio transceiver mounted in said housing and coupled to said system connector; and

said radio transceiver being specially adapted for communication of said signals from said equipment with said wireless network in accordance with a preselected communication standard.

2. A modular unit as set forth in claim 1 wherein said system connector comprises a plurality of contacts arranged along said first end of said housing and adapted for engagement with a coupling connector disposed in said equipment.

3. A modular unit as set forth in claim 2 and including an antenna connector disposed along an end of said housing and connected to said radio transceiver within said housing to enable communication from said radio transceiver.

4. A modular unit as set forth in claim 3 wherein said antenna connector is disposed along a second end of said housing and adapted for coupling to an antenna secured to said housing.

5. A modular unit as set forth in claim 1 wherein said equipment includes an antenna mounted

-23-

3       therein and said housing includes an antenna connector  
4       adapted for connection with said antenna.

1           6.    A modular unit as set forth in claim 5  
2       wherein said antenna connector of said housing is  
3       disposed adjacent said system connector on said first  
4       end of said housing.

1           7.    A modular unit as set forth in claim 1 and  
2       further including a power connector for coupling to an  
3       external power supply for the supply of additional  
4       current thereto.

1           8.    A modular unit as set forth in claim 7  
2       wherein said power connector on said unit includes  
3       contacts disposed on said first end of said housing  
4       adjacent said system connector.

1           9.    A modular unit as set forth in claim 1  
2       wherein said electronic equipment comprises a personal  
3       computer.

1           10.   A modular unit as set forth in claim 1  
2       wherein said electronic equipment comprises a cellular  
3       telephone.

1           11.   A modular unit as set forth in claim 1  
2       wherein said electronic equipment comprises a personal  
3       computer having a built-in antenna, said antenna being  
4       connected to said radio transceiver by means of a  
5       coaxial connector, and said modular unit further  
6       including a connector for coupling to a power source  
7       for the supply of power thereto.

-24-

1           12. A modular telecommunications unit for  
2 enabling communication from an item of electronic  
3 equipment, said unit comprising:

4           a housing for mounting a radio transceiver  
5 constructed for telecommunications in accordance with  
6 a preselected standard;

7           a plurality of contacts arranged along a  
8 first end of said housing and adapted for engagement  
9 with a connector in said item of electronic equipment;  
10 and

11           at least one radio connector disposed along  
12 one end of said housing and connected to said radio  
13 transceiver within said housing, said connector adapted  
14 for being coupled to an antenna to enable communication  
15 from said radio transceiver.

1           13. A modular unit as set forth in claim 12 and  
2 further including an antenna structure wherein said  
3 radio connector includes a coaxial antenna connector  
4 secured along a second end of said housing and coupled  
5 to said antenna structure disposed outwardly thereof.

1           14. A modular unit as set forth in claim 12  
2 wherein said modular unit also includes a power  
3 connector for coupling to a power unit for the supply  
4 of current thereto.

1           15. A modular unit as set forth in claim 14  
2 wherein said power connector of said module includes  
3 enlarged contacts disposed adjacent said plurality of  
4 contacts for coupling additional power to said unit.

1           16. A modular unit as set forth in claim 12  
2 wherein said equipment includes an antenna mounted  
3 therein and said radio connector is mounted on a second

-25-

4 end of said housing to thereby enable connection  
5 between said antenna disposed within said equipment and  
6 said radio transceiver.

1 17. A modular unit as set forth in claim 16  
2 wherein said electronic equipment is constructed with  
3 a slotted portion having said connector disposed along  
4 a first end thereof, said slotted portion being adapted  
5 for receipt of said housing therein.

1 18. A modular unit as set forth in claim 17  
2 wherein said slotted portion of said electronic  
3 equipment includes a closure member along a second,  
4 opposite end of said slotted portion for securing said  
5 housing therein and wherein said antenna disposed  
6 within said equipment is connected to said radio  
7 connector through said closure member.

1 19. A modular unit as set forth in claim 12  
2 wherein said electronic equipment comprises a personal  
3 computer having a built-in antenna, said antenna being  
4 connected to said radio transceiver by means of a  
5 coaxial connector, said modular unit further including  
6 a connector for coupling to an external power source.

1 20. A modular unit as set forth in claim 12  
2 wherein said housing is adapted for receipt in, and  
3 electrical connection to, both a personal computer and  
4 a cellular telephone.

-26-

1           21. A method of providing telecommunications from  
2 an item of electronic equipment comprising the steps  
3 of:  
4           providing a modular telecommunication unit  
5 having a transceiver housed therein;  
6           disposing a coupling connector on a first end  
7 of said telecommunications unit with said transceiver  
8 coupled thereto;  
9           programming said transceiver for  
10 telecommunications in accordance with a preselected  
11 standard;  
12           providing a telecommunications unit mounting  
13 structure in association with said equipment;  
14           disposing a mating connector within said  
15 mounting structure for the engagement of said coupling  
16 connector;  
17           providing an antenna for connection to said  
18 telecommunication unit; and  
19           plugging said coupling connector of said  
20 telecommunication unit into said mating connector of  
21 said mounting structure to establish electrical  
22 communication therebetween and the enablement of  
23 telecommunication from said electronic equipment.

1           22. A method of providing telecommunications as  
2 set forth in claim 21 wherein said step of providing a  
3 telecommunications unit mounting structure includes the  
4 step of forming a slot in said equipment and disposing  
5 said mating connector within said slot in position for  
6 said engagement of said coupling connector.

1           23. A method of providing telecommunications as  
2 set forth in claim 21 and further including the steps  
3 of providing at least one radio connector on said  
4 telecommunications unit, disposing said radio connector

-27-

5 along one end of said telecommunications unit, and  
6 coupling said radio connector to said antenna.

1 24. A method of providing telecommunications as  
2 set forth in claim 23 wherein said step of disposing  
3 said radio connector along one end of said  
4 telecommunications unit includes the step of securing  
5 said radio connector along said first end of said unit  
6 adjacent said coupling connector.

1 25. A method of providing telecommunications as  
2 set forth in claim 23 wherein said step of disposing  
3 said radio connector along one end of said  
4 telecommunications unit includes the steps of disposing  
5 said radio connector along a second end of said unit.

1 26. A method of providing telecommunications as  
2 set forth in claim 25 wherein said step of providing an  
3 antenna includes the step of mounting said antenna  
4 within said equipment.

1 27. A method of providing telecommunications as  
2 set forth in claim 21 wherein said electronic equipment  
3 comprises a personal computer.

1 28. A method of providing telecommunications as  
2 set forth in claim 21 wherein said electronic equipment  
3 comprises a portable communication device.



1 29. A method of providing telecommunications as  
2 set forth in claim 21 and further including the step of  
3 providing a modem within said telecommunications unit  
4 for telecommunication of data received from said  
5 equipment.

-28-





1        30. A method of providing telecommunications as  
2        set forth in claim 21 wherein said step of providing a  
3        telecommunications unit mounting structure includes the  
4        step of forming a slot within said equipment, disposing  
5        said mating connector within said slot for the  
6        engagement of said coupling connector, and providing a  
7        closure member along a second, opposite end of said  
8        slot for securing said unit within therein, and  
9        connecting said antenna to said unit.

1        31. A method of providing telecommunications as  
2        set forth in claim 30 and further including the step of  
3        connecting said antenna to said transceiver through  
4        said closure member.

1/7

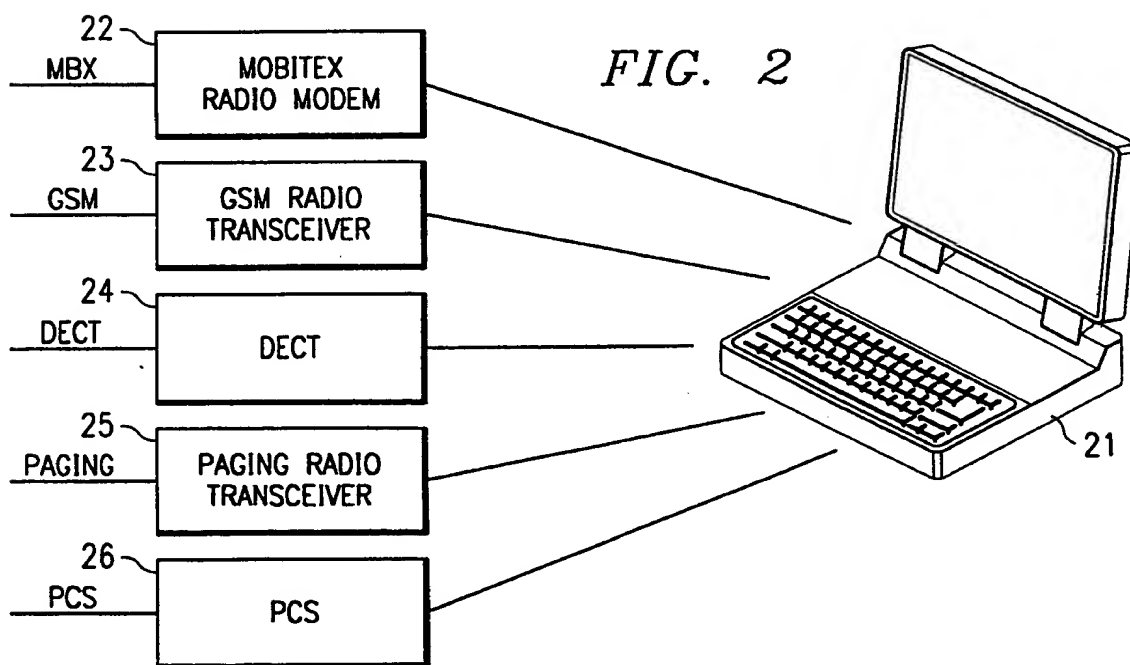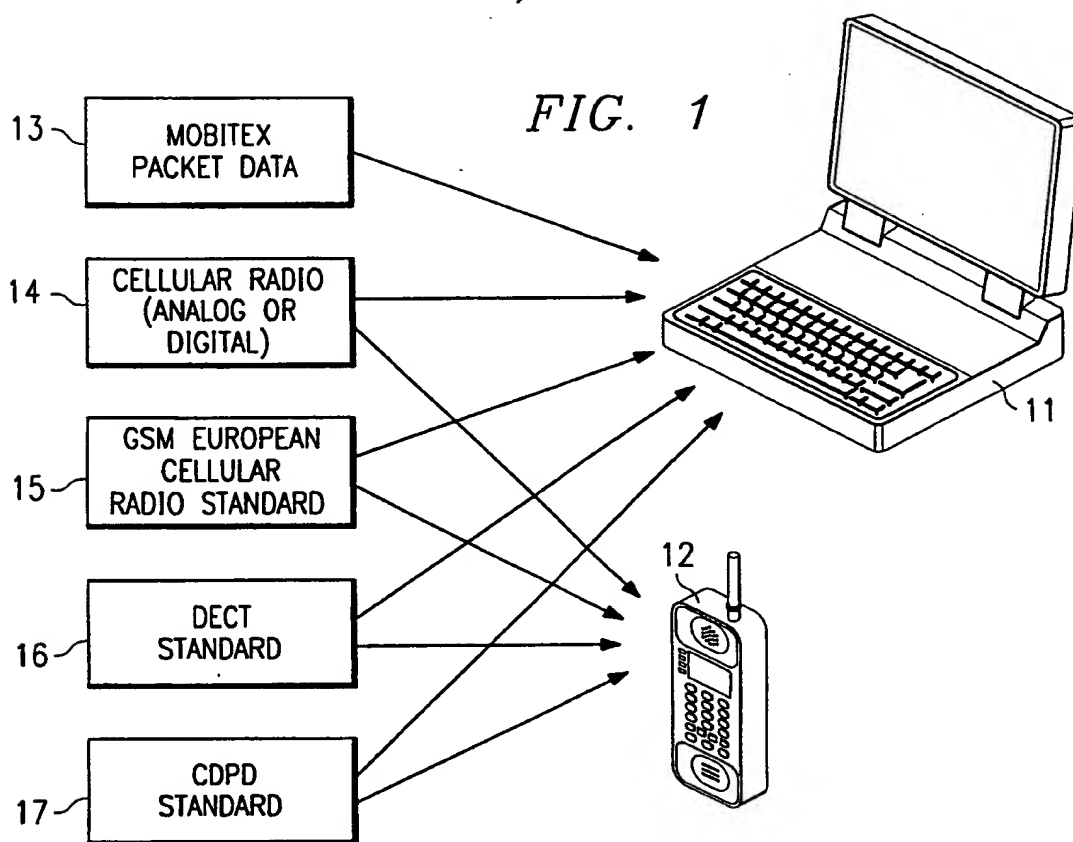



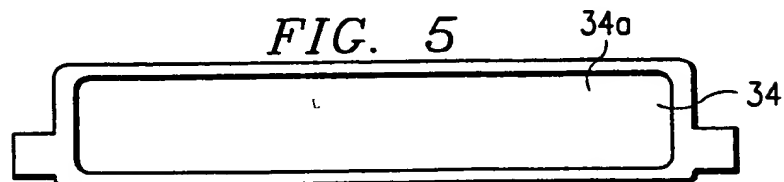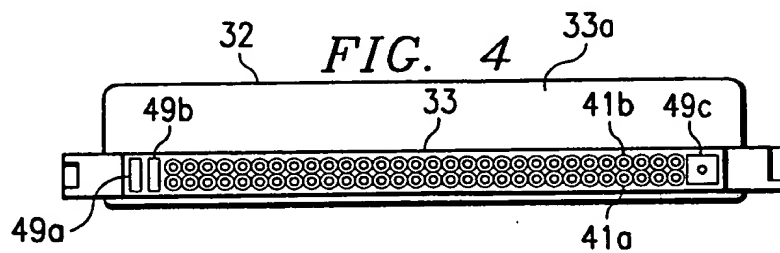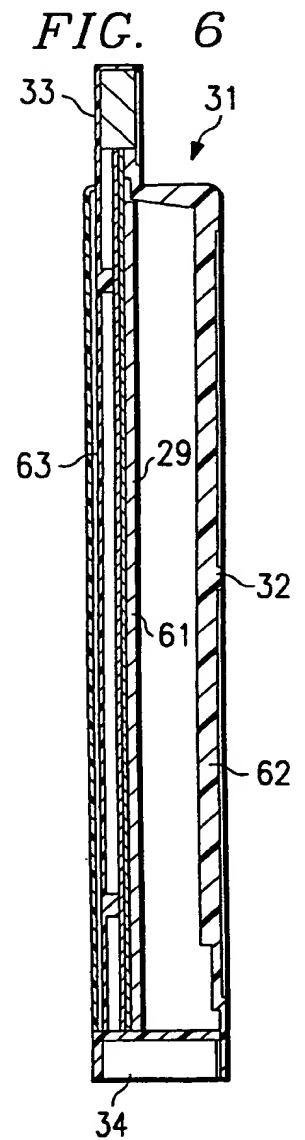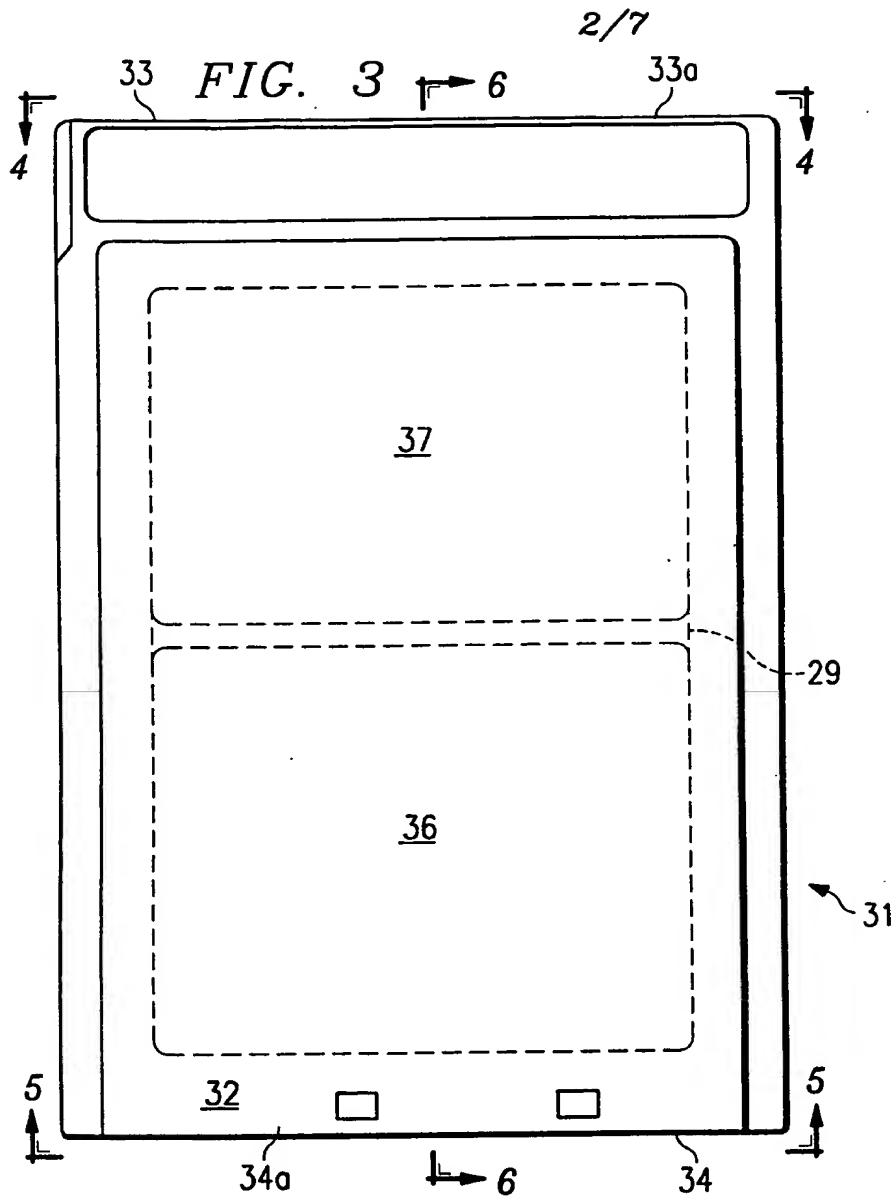

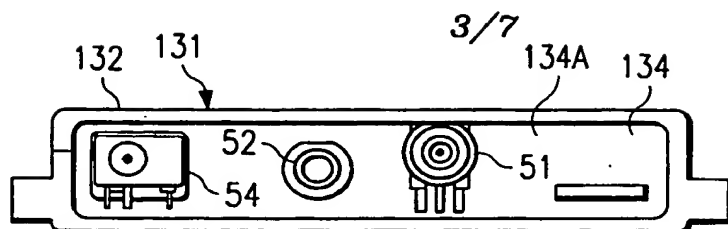


FIG. 7

FIG. 8 → 9


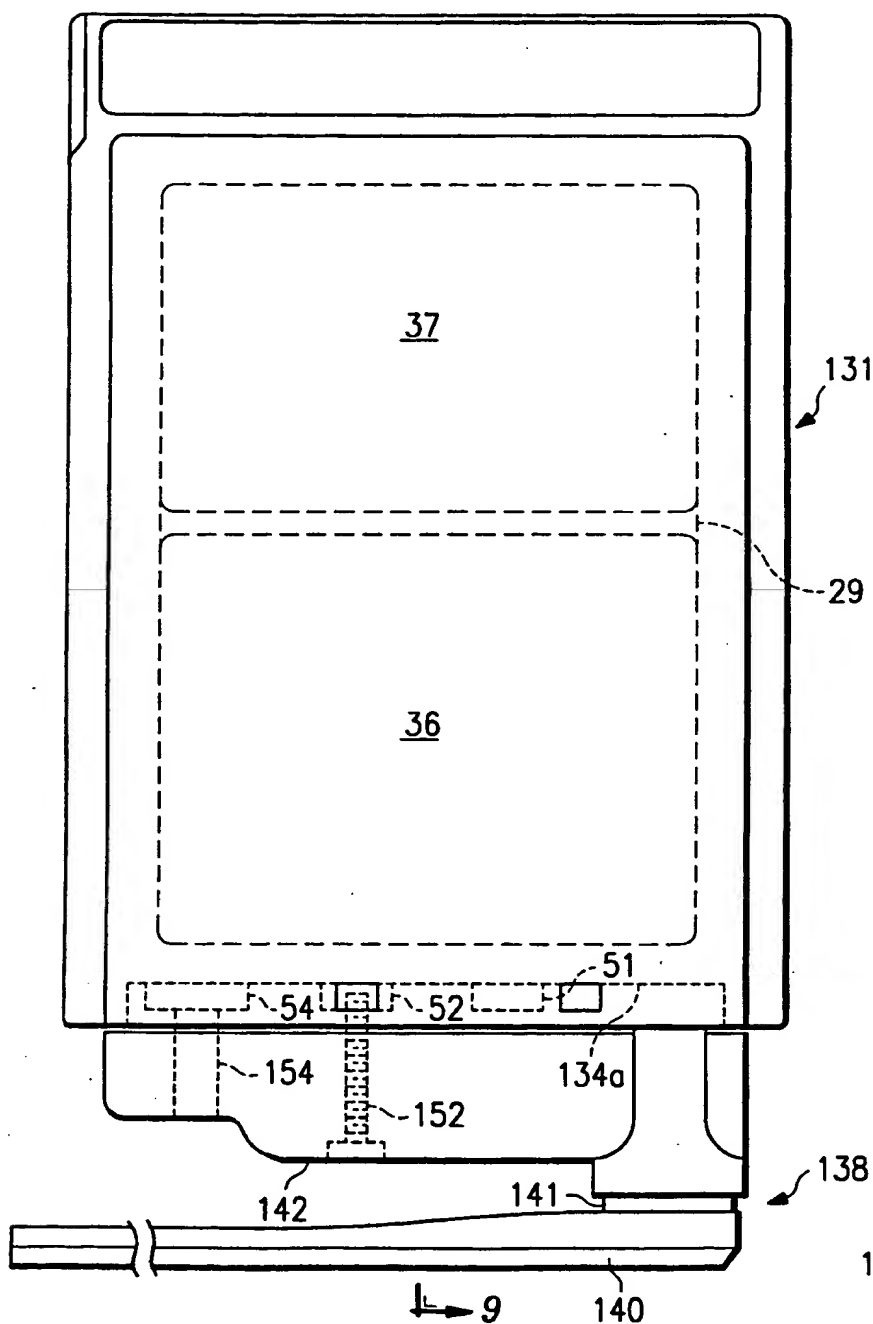


FIG. 9

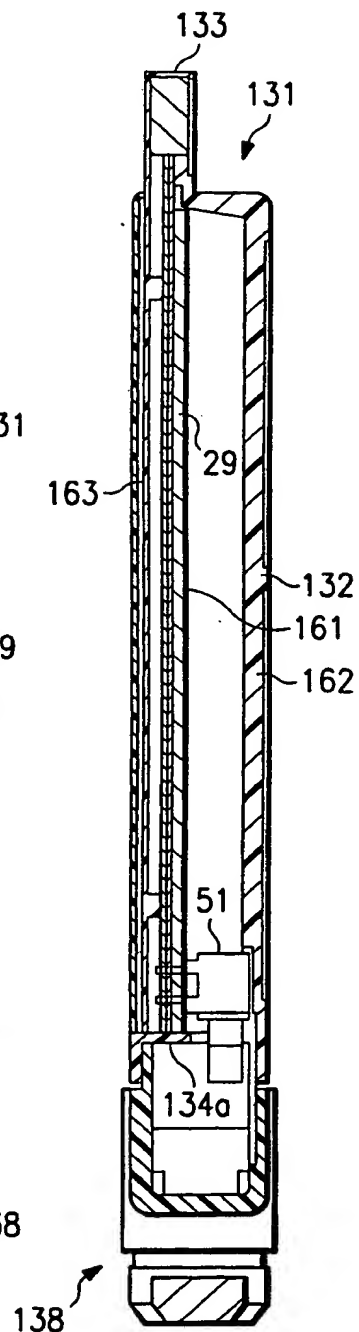

4/7

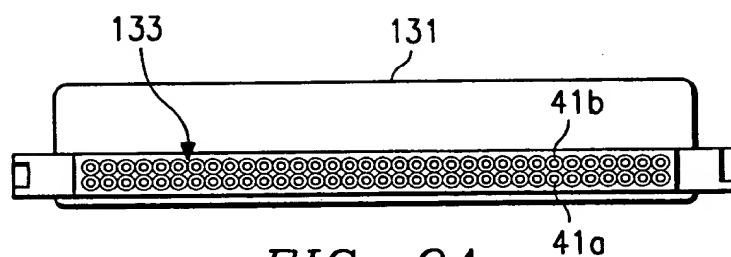
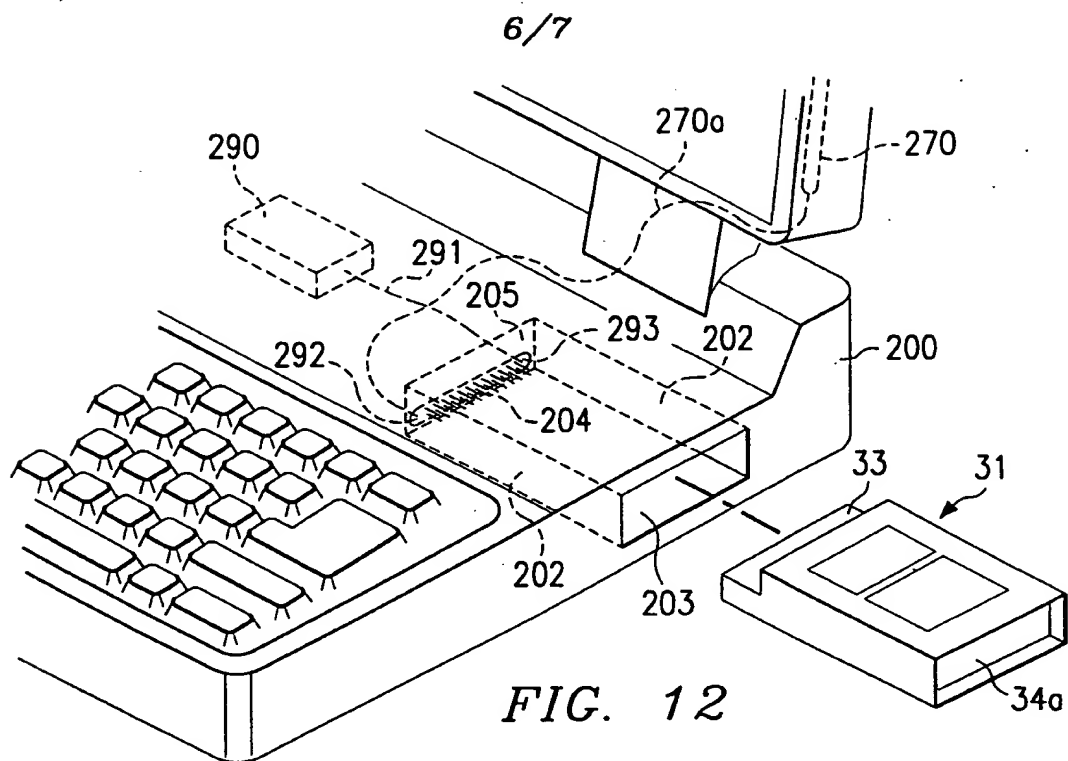


FIG. 9A





*FIG. 12*


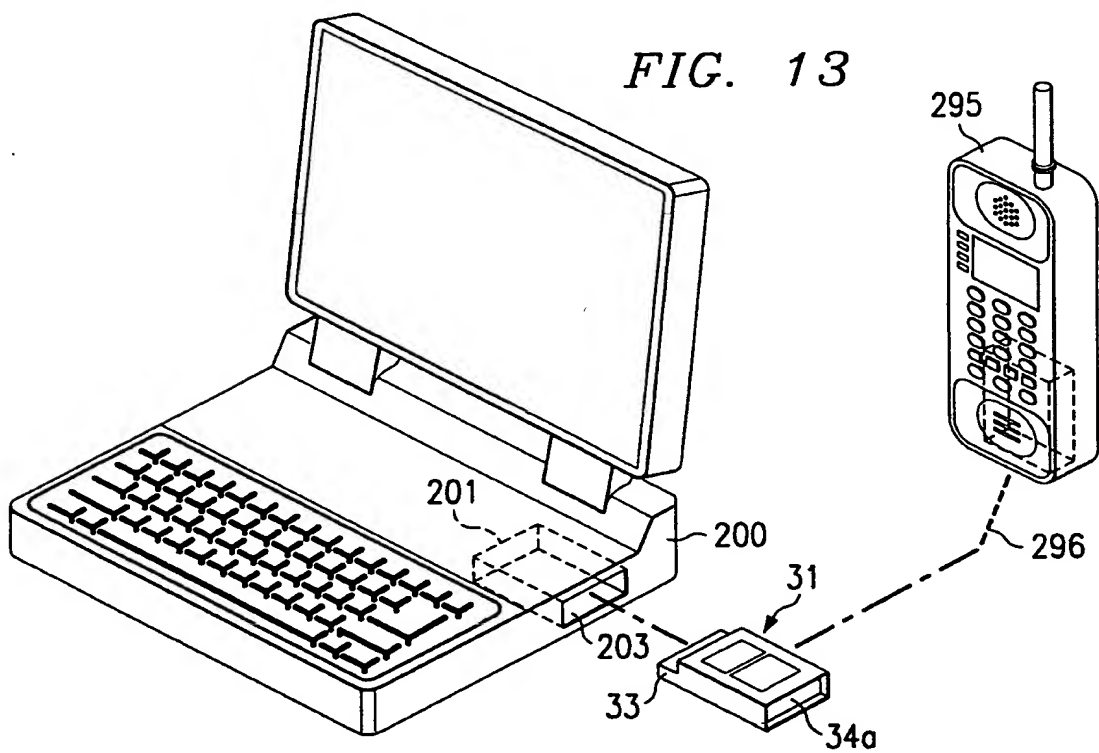


FIG. 13

7/7

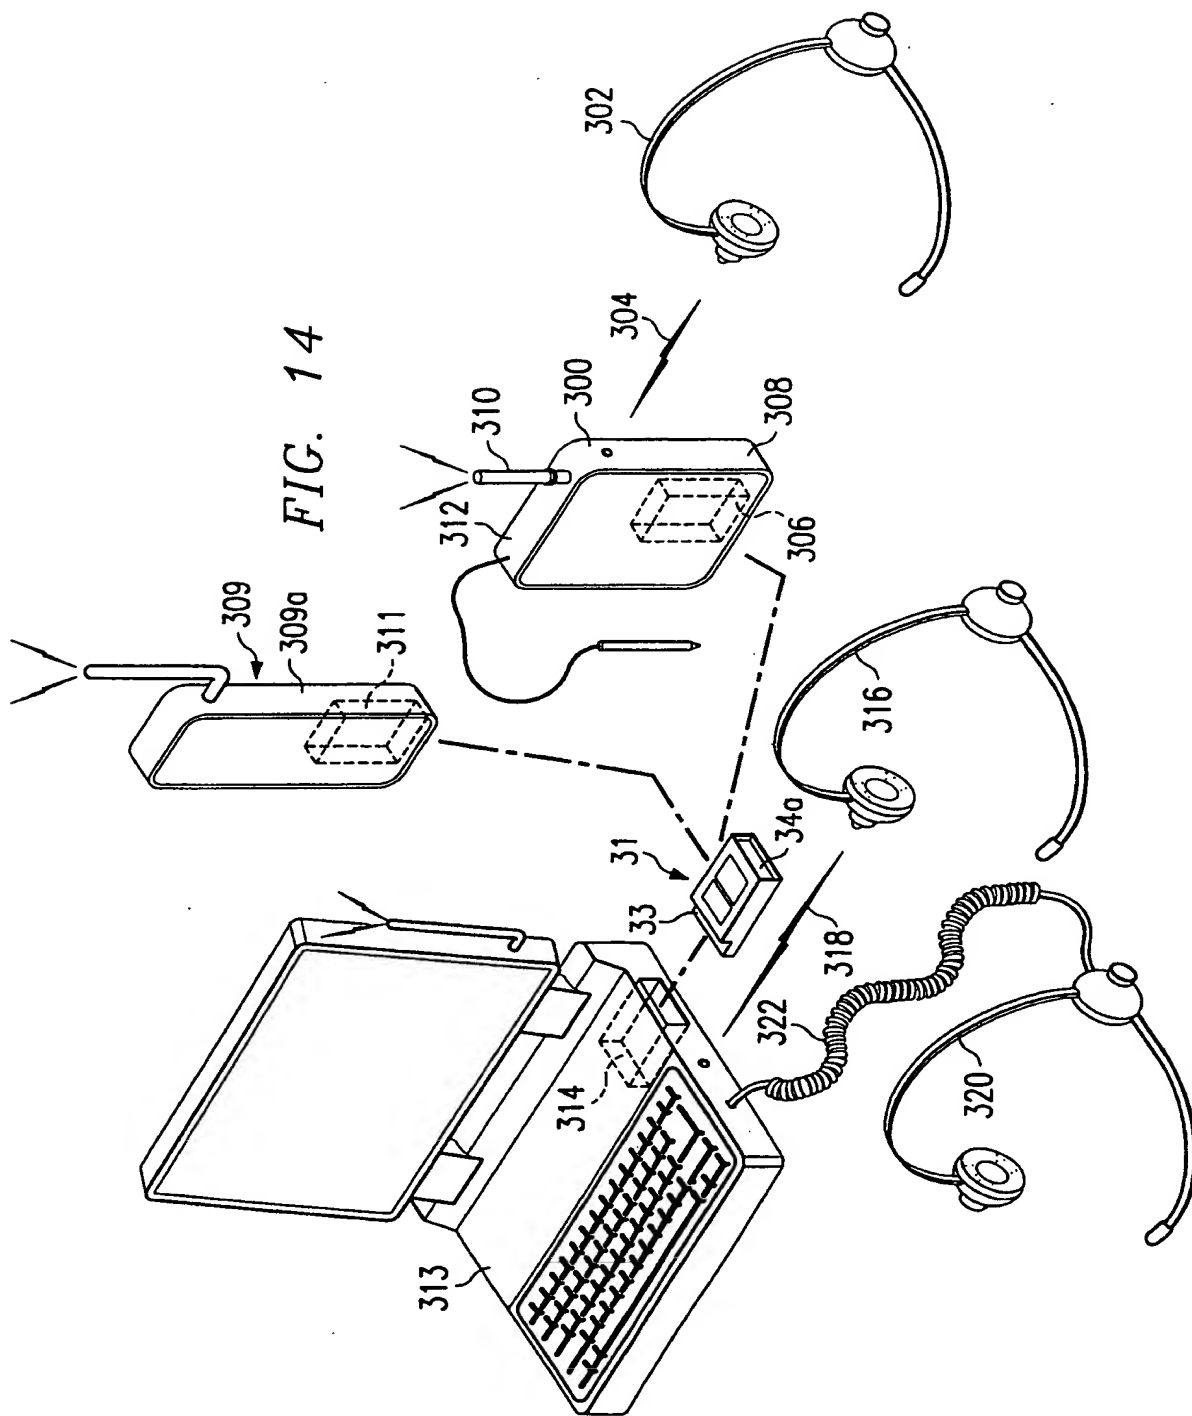

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 94/00168

## A. CLASSIFICATION OF SUBJECT MATTER

IPC5: H04B 7/26, H04M 1/72, H04M 11/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC5: H04B, H04M, H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## WPI, CLAIMS

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 5020090 (WALKER C. MORRIS), 28 May 1991 (28.05.91), column 2, line 60 - column 5, line 43, figures 1,7	1,2,9,12,14
A	--	7,11,16,19, 21,22
X	US, A, 4881258 (RYOICHI KAIWA ET AL), 14 November 1989 (14.11.89), column 5, line 36 - column 8, line 30; column 9, line 47 - column 10, line 25, figures 3,4,20	1-3,7,8,10, 12,14
	--	

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "B" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

15 June 1994

17 -06- 1994

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Bo Gustavsson  
Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 94/00168

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 4972457 (HARRY M. O'SULLIVAN), 20 November 1990 (20.11.90), column 5, line 45 - column 8, line 50	1,2,7,9,12, 14
A	---	5,11,16,17, 19,21,22, 27-29
Y	DE, C1, 4136548 (SEDLBAUER AG), 24 Sept 1992 (24.09.92)	1,2,7,9,12, 14
A	---	8
A	WO, A1, 9003076 (INTELLIGENCE TECHNOLOGY CORPORATION), 22 March 1990 (22.03.90), page 2, line 23 - page 3, line 37, figures 1,3	1,5,9,11,12, 16,19
P,A	EP, A1, 0571125 (INTERNATIONAL BUSINESS MACHINES CORPORATION), 24 November 1993 (24.11.93)	1,5,9,11,12, 16,19
	-----	



**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

28/05/94

International application No.  
PCT/SE 94/00168

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US-A-	5020090	28/05/91	EP-A-	0452478	23/10/91
US-A-	4881258	14/11/89	GB-A,B-	2196210	20/04/88
			GB-A,B-	2234651	06/02/91
			JP-A-	63050235	03/03/88
			JP-A-	63050236	03/03/88
			JP-A-	63050237	03/03/88
			JP-A-	63051755	04/03/88
US-A-	4972457	20/11/90	NONE		
DE-C1-	4136548	24/09/92	EP-A-	0541119	12/05/93
WO-A1-	9003076	22/03/90	AU-A-	4310289	02/04/90
			EP-A-	0387338	19/09/90
EP-A1-	0571125	24/11/93	NONE		